# 8.6 Patch Panels





### Standards

- IEC60297-3-2010
  Dimension of mechanical
  structure of 19 inches series
- IEC24764-2010 Generic Cabling Systems for Data Centres

# UCCONNECT® UC9500 High Density Fibre Suite

# UC9500 1U Distribution Panel 4 Slot Empty

# Features


- Supported adaptor includes LC. SC , FC , ST , MPO , MTP®
- Mount to standard EIA 19" rack rails
- Removable top cover provides access to connections, fibers, and slack storage in rear of tray
- Multiple trunk cable entry locations provided on rear and sides of enclosure
- Include fiber optic cable routing kit for cable management
- One Distribution panel able accepts both conventional 1-2 fibre applications as well as 12-24 fibre MPO/MTP® applications.

# Application

UC9500 1U Distribution Panel 4-Slot Empty, Fixed is engineered to support both UC9500 simplex/duplex LC/ SC/ ST/FC front panels and MPO/MTP $^{\circ}$  modules. This unque design allows one footprint to accept 1, 2, 12 and 24 fibre applications.

Construction		
Material	Details	
Matrix	Steel 1.0mm thickness	
Lock	Push-Pull Rivet Black	
Cable routing kit	ABS Black	
Dimension	1U x 465mm x 341.5mm	
Weight	3kg - Empty	
Surface Finish	Stain Resistant Coating	

- + Standard Panel comes without fibre adapter, front-panel and splice tray.
- + Fits up to 2 nos. UC9500 Splice Tray 24F (PPST9521-24) and 1 no. UC9500 Splice Tray Cover ( PPST9521-C)

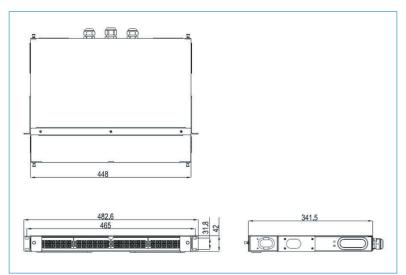

Ordering Information		
UC P/N	Product Description	P.U
PP9500	UC9500 1U Distribution Panel 4 Slot Empty	1 рс