

UC C300 MJ TR U WH V1/ BK V1


Keystone Jack, Cat.5e, RJ45, UTP, 180°, Punch-down, White/ Black

Specification

Item	Description
RJ45 Housing	ABS+PC, UL94V0
Contacts and IDC	Phosphor bronze
Contact Surface Finish	50u" gold plated over contact area
IDC Surface Finish	Tin plated
IDC Housing	PC, UL94V0
PCB	FR4 94V0

Performance

Item	Description
Wiring	TIA 568 A/B
IDC Type	110
Insertion Force	<=30N
Plug Insertion Life	800 times insertion (RJ45, RJ11/RJ12)
Wire Size Capability	24 ~ 26 AWG solid wire

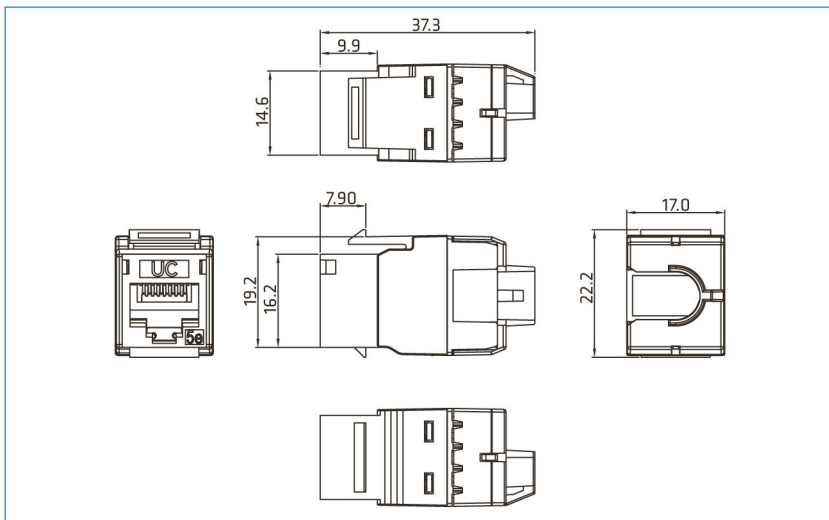

- Category 5e hardware compliant performance.
- High Density Design provides optimize usage of rack space.
- Requires Punch-down Tool P/N CJ9340.
- Component level tested.

Ordering Information

SAP IC	UC P/N	UC Material Code	Product Description	P.U
YMJBPO1563	MJTR8660W	UC C300 MJ TR U WH V1	Keystone Jack, Cat.5e, RJ45, UTP, 180°, Punch-down, White	1pc/bag
YMJBPO1564	MJTR8660B	UC C300 MJ TR U BK V1	Keystone Jack, Cat.5e, RJ45, UTP, 180°, Punch-down, Black	1pc/bag